



新峰连接插头

严苛的品质标准，只为更安全的应用体验



PB20插座参数

PB20 PLUG-IN PARAMETERS

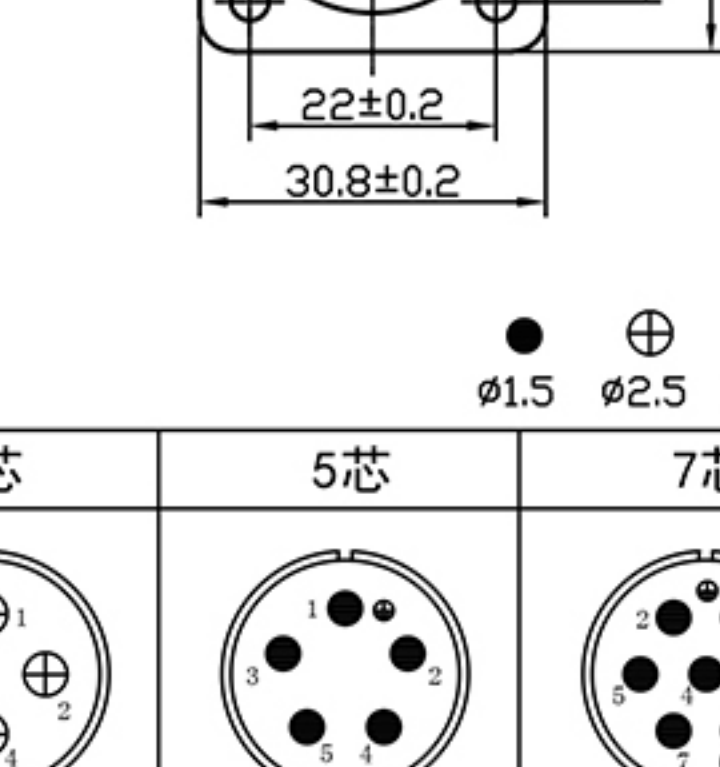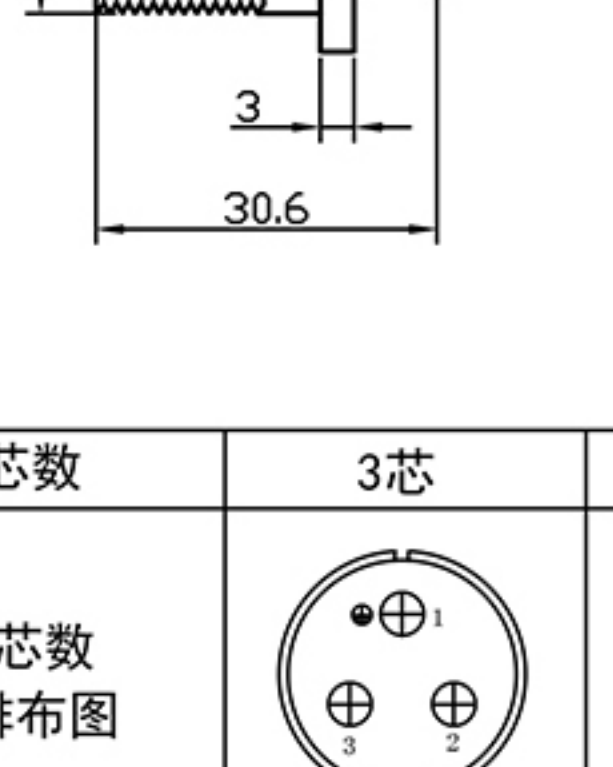

芯数	3芯	4芯	5芯	7芯
芯数排布图				
额定电流A	⊕ 25A	⊕ 25A	● 10A	● 10A
额定电压V	400V	400V	250V	250V
焊线直径mm	≤2.2mm	≤2.2mm	≤1.5mm	≤1.5mm
焊线面积mm ²	≤3.8mm ²	≤3.8mm ²	≤1.7mm ²	≤1.7mm ²
接触电阻mΩ	≤1 mΩ	≤1 mΩ	≤2.5 mΩ	≤2.5 mΩ
耐电压V	1500V	1500V	1000V	1000V


商品实拍

PRODUCT PHOTO

PB20J3Z



PB20J4Z

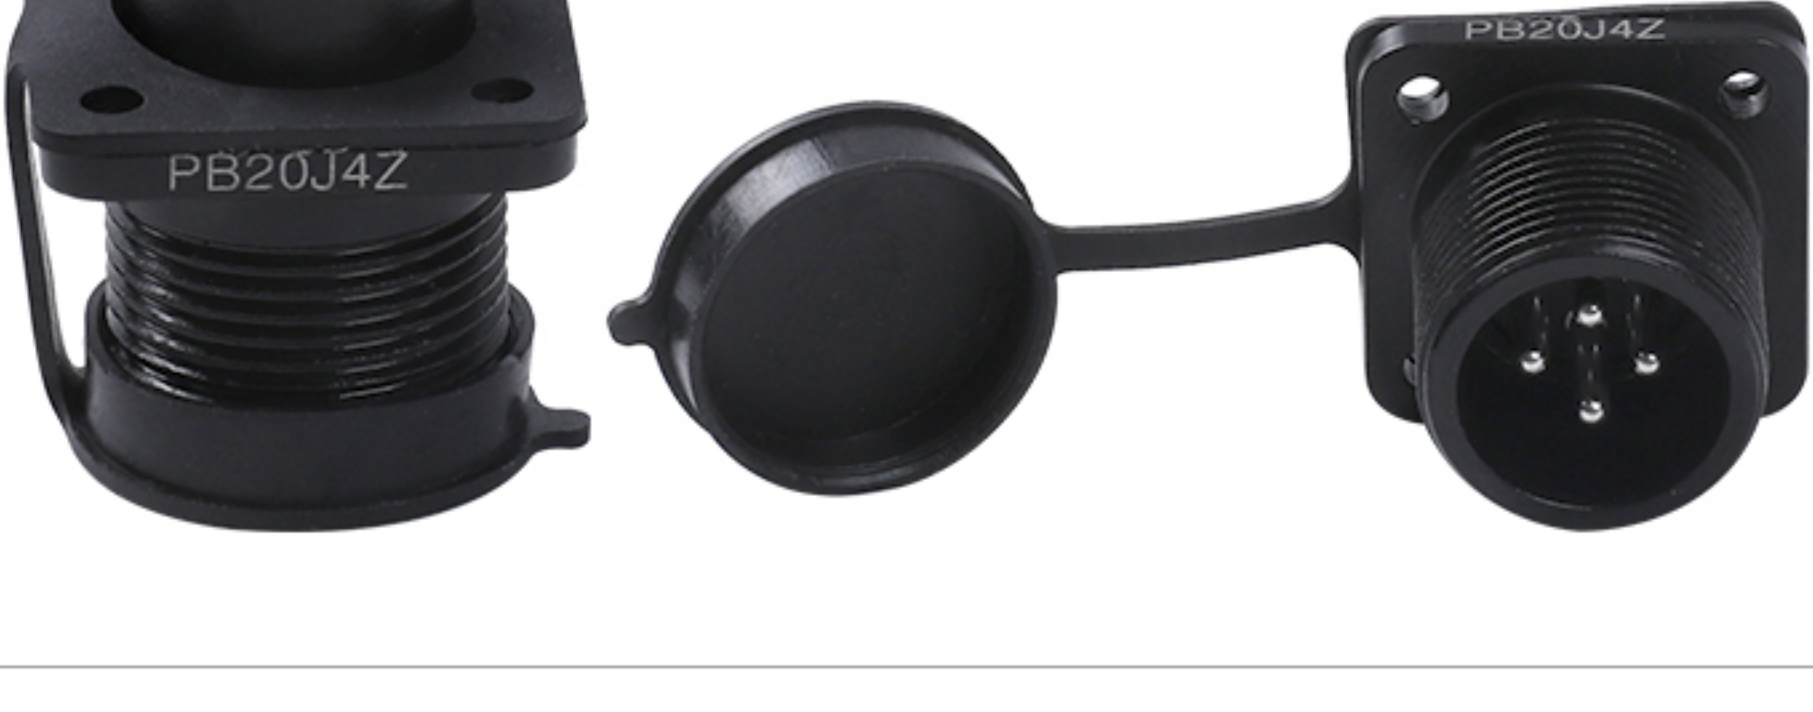

PB20J5Z



PB20J7Z





插座



PB20插头参数

PB20 PLUG PARAMETERS

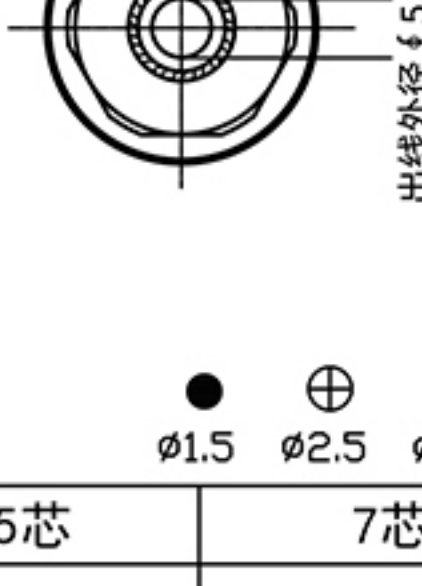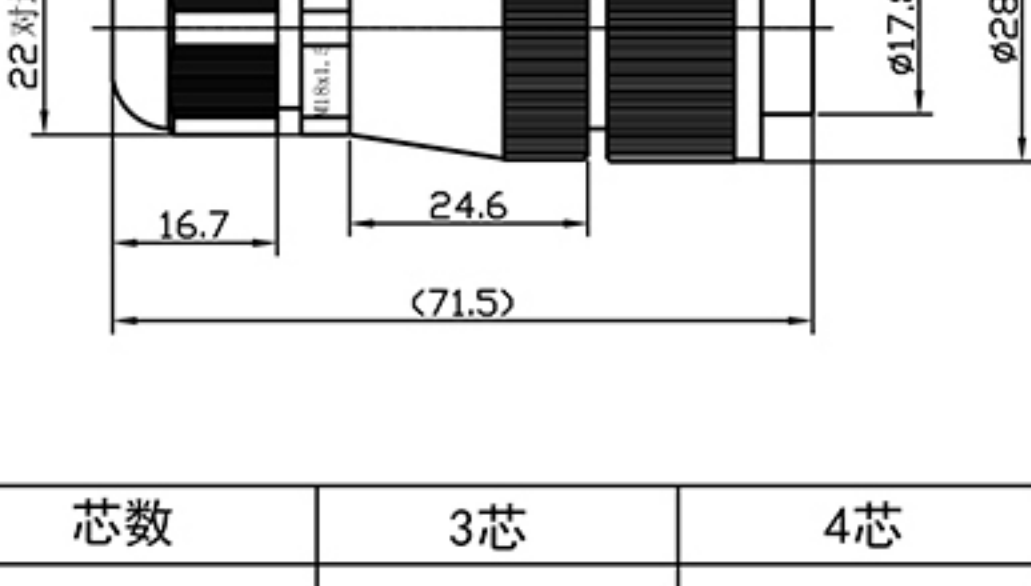

芯数	3芯	4芯	5芯	7芯
芯数排布图				
额定电流A	⊕ 25A	⊕ 25A	● 10A	● 10A
额定电压V	400V	400V	250V	250V
焊线直径mm	≤2.2mm	≤2.2mm	≤1.5mm	≤1.5mm
焊线面积mm ²	≤3.8mm ²	≤3.8mm ²	≤1.7mm ²	≤1.7mm ²
接触电阻mΩ	≤1 mΩ	≤1 mΩ	≤2.5 mΩ	≤2.5 mΩ
耐电压V	1500V	1500V	1000V	1000V

商品实拍

PRODUCT PHOTO

P20K3TM



P20K4TM



P20K5TM



P20K7TM



插头

