


新峰连接插头



7. 可的品质标准，六为更广泛的应用体验




2




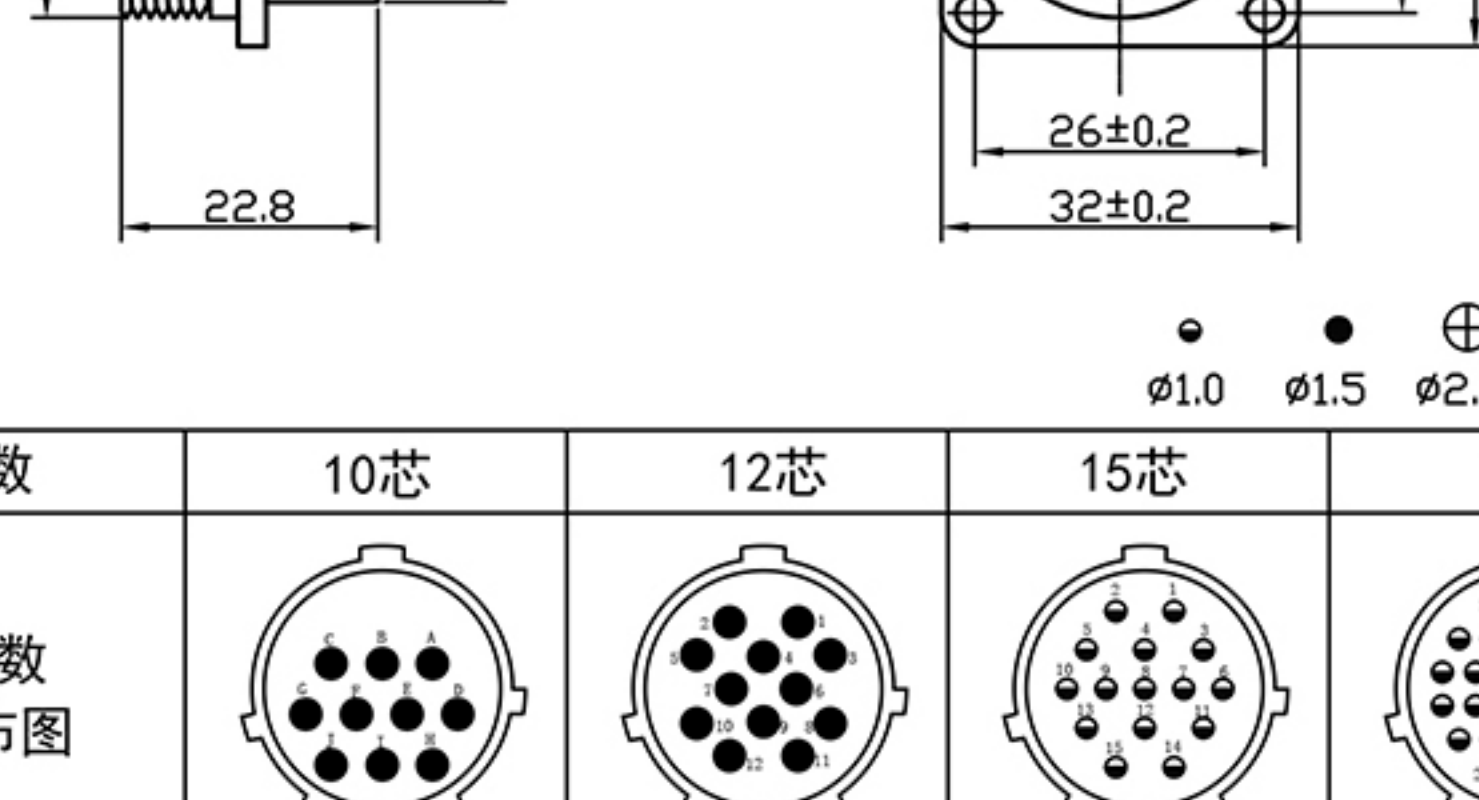


				
额定电流A	● 10A	● 10A	● 5A	● 5A
额定电压V	250V	250V	250V	250V
焊线直径mm	≤1.5mm	≤1.5mm	≤0.8mm	≤0.8mm
焊线面积mm²	≤1.7mm²	≤1.7mm²	≤0.5mm²	≤0.5mm²
接触电阻mΩ	≤2.5 mΩ	≤2.5 mΩ	≤5 mΩ	≤5 mΩ
耐电压V	1000V	1000V	500V	500V

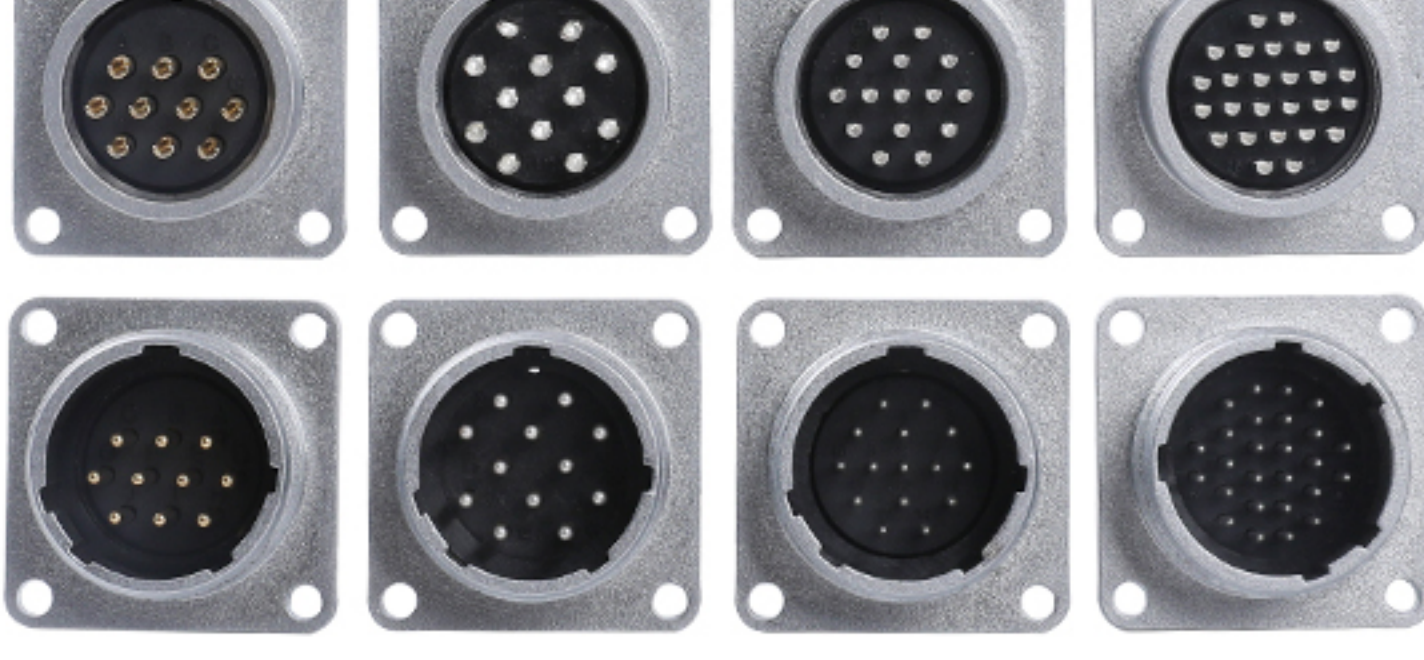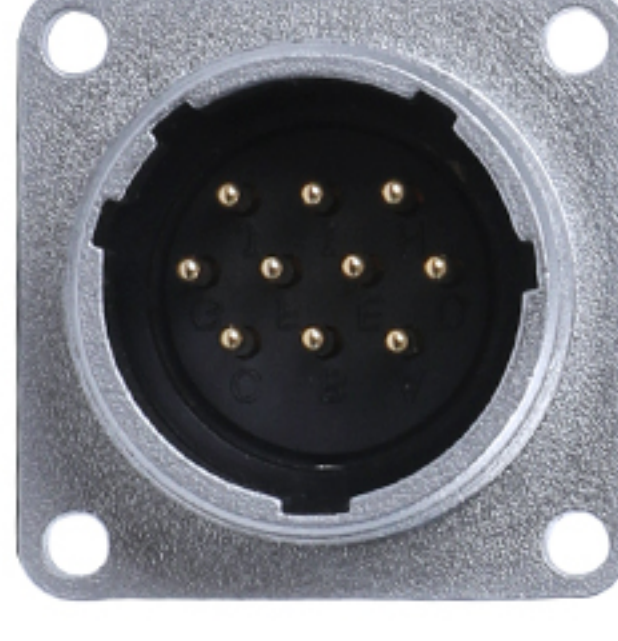

WS24 PLUG PARAMETERS

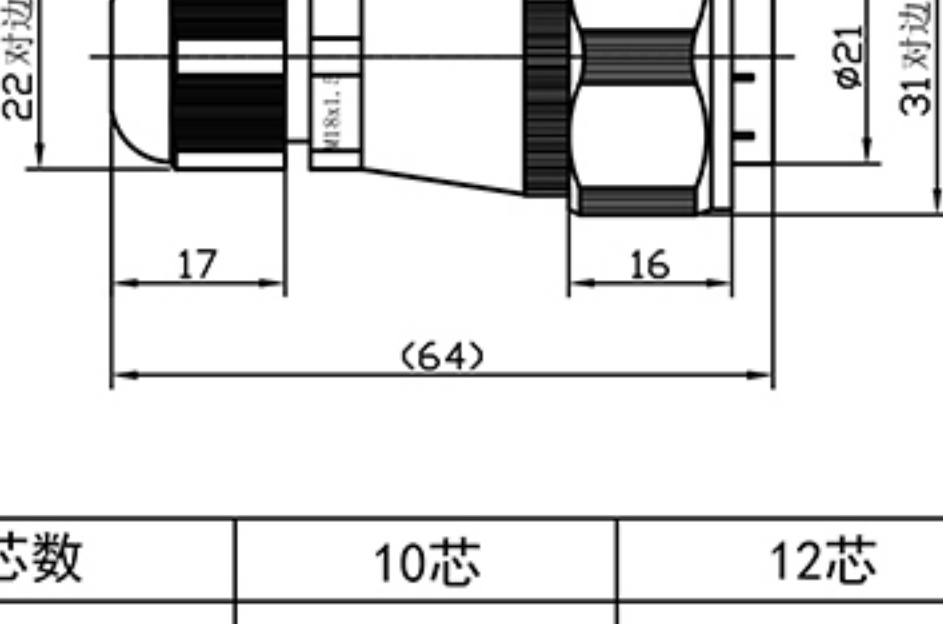

芯数 排布图				
额定电流A	● 10A	● 10A	● 5A	● 5A
额定电压V	250V	250V	250V	250V
焊线直径mm	≤1.5mm	≤1.5mm	≤0.8mm	≤0.8mm
焊线面积mm ²	≤1.7mm ²	≤1.7mm ²	≤0.5mm ²	≤0.5mm ²
接触电阻mΩ	≤2.5 mΩ	≤2.5 mΩ	≤5 mΩ	≤5 mΩ
耐电压V	1000V	1000V	500V	500V

商品实拍

PRODUCT PHOTO

